

**THK**  
**NEW**



# LM Guide Actuators Featuring Caged Ball Technology

## Caged Ball Technology Offers

Long life and long-term, maintenance-free operation  
Excellent high speed performance  
Reduced variations in rolling resistance and low noise

**SKR**



**THK CO., LTD.**  
TOKYO, JAPAN

Catalog No. 309-4E

# Type SKR LM Guide Actuator with Caged Ball Technology

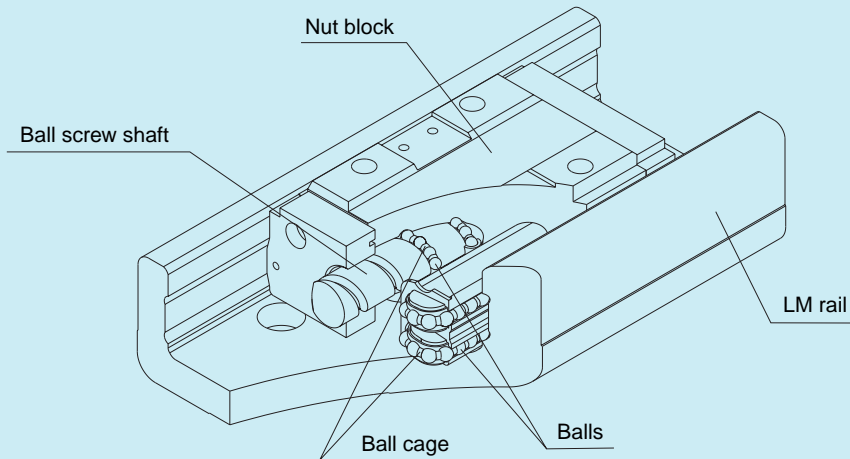


Figure 1 Construction of SKR-type LM Guide Actuator with Caged Ball Technology

## Construction and Features

The SKR-type LM guide actuator with Caged Ball Technology is a compact actuator that places a nut block(s) that integrates an LM block and ball screw nut onto the inside of the LM rail of a U-shaped cross-sectional form. Moreover, the addition of the LM guide and ball screw sections with Caged Ball Technology allows the SKR-type LM guide actuator to achieve higher speed, lower noise, longer maintenance-free operation, and other features in comparison with the conventional KR-type.

### 1. Four-way Equal Load Rating

Each row of balls is arranged at a contact angle of  $45^\circ$  so that loads acting on the nut block in the four directions (radial, reverse-radial, and two lateral directions) show the same load rating. Thus, the SKR-type LM guide actuators can be used in any position.

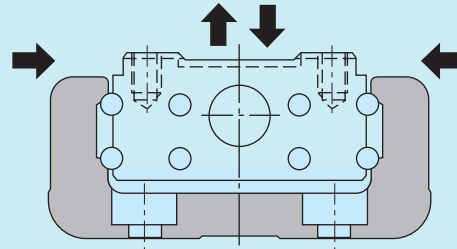


Figure 2 Load-carrying Capacity and Contact Angles of the SKR

### 2. High Rigidity

The adoption of the LM rail of a U-shaped cross-sectional form allows improved rigidity against moment

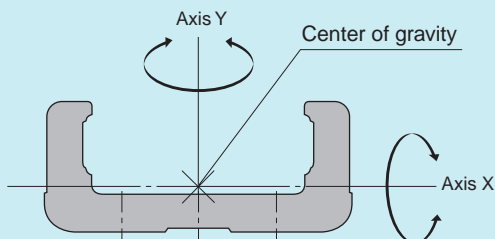


Figure 3 Sectional View of LM Rail

Table 1 LM Rail Cross-sectional Characteristics

Model No.	Unit:mm <sup>4</sup>		
	$I_x$	$I_y$	Mass (kg/100mm)
SKR33	$5.35 \times 10^4$	$3.52 \times 10^5$	0.61
SKR46	$2.05 \times 10^5$	$1.45 \times 10^6$	1.26

$I_x$  = geometrical moment of inertia around axis X

$I_y$  = geometrical moment of inertia around axis Y

### 3. High Accuracy

The linear motion guide raceway has four rows of circular arc grooves that provide smooth motion by mere pre-load; clearance-free, highly rigid guidance is obtained. In addition, changes in frictional resistance resulting from load variations are minimized, allowing the SKR-type to achieve high-precision feed.


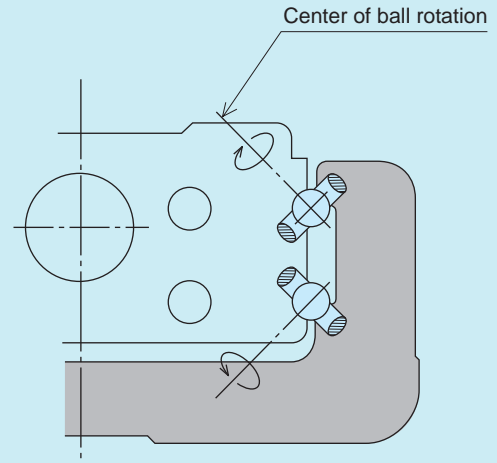


Figure 4 Contact Structure of SKR-Type

### 4. Space Saving

The integration of a LM guide raceway on both side faces of a nut block and the integration of a ball screw nut at the center of the nut block allow the SKR-type to achieve high rigidity and high precision in a minimal space.

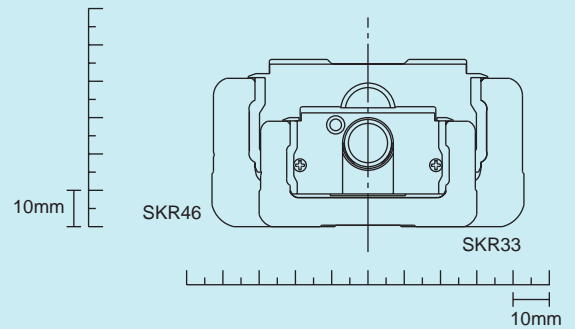

### 5. Long Life Span and Long-term Maintenance-free Operation

Thanks to the effectiveness of its ball retainers, the SKR has improved grease retention capability, allowing it to achieve a long life span and long-term maintenance-free operation.

The SKR achieves a longer life span because its basic dynamic load rating at the LM guide and ball screw sections is greater than that of the conventional KR models (in the case of the KR3310, three times greater). The rated life span can be calculated by the following equation.

LM guide

$$L = (C / P)^3 \times 50$$

L : rated life span (km)

C : Basic dynamic load rating (N)

P : carrying load (N)

Ball screw

$$L = (Ca / Fa)^3 \times 10^6$$

L : rated life span (rev.)

Ca : Basic dynamic load rating (N)

Fa : carrying load in axial direction (N)

From the noted equations, the greater the Basic dynamic load rating, the longer the life span for both the LM guide and ball screw sections.

Table 2 Comparison of the Basic Dynamic Load Rating between the SKR and Conventional KR Types

Basic dynamic load rating		SKR3310	KR3310	SKR4620	KR4620
LM Guide unit	Long type block	17000	11600	39500	27400
	Short type block	11300	4900	28400	14000
Ball screw unit		2700	1760	4240	3040

Unit: N

## 6. High Speed

Through the use of Caged Ball Technology, the SKR-type is compatible with the latest high-speed rotational AC servo-motors (6000 min<sup>-1</sup>), achieving higher speeds than the conventional KR-type. The ball screw lead settings of the conventional KR33 type were 6 mm and 10 mm. To achieve a higher feed rate, a 20 mm ball screw lead has been added to the new SKR 33 series.

Table 3 Maximum Traverse Rate

Model No.	Ball Screw lead (mm)	LM rail length (mm)	Maximum travel speed (mm/s)	
			Long block	Short block
SKR33	06	150	600	
		200	600	
		300	600	
		400	600	
		500	600	
		600	552	530
		700	393	364
	10	150	1,000	
		200	1,000	
		300	1,000	
		400	1,000	
		500	1,000	
		600	920	839
		700	656	607
	20	150	2,000	—
		200	2,000	—
		300	2,000	—
		400	2,000	—
		500	2,000	—
		600	1,780	—
		700	1,276	—
SKR46	10	340	1,000	—
		440	1,000	
		540	1,000	
		640	1,000	914
		740	736	667
		940	431	400
	20	340	2,000	
		440	2,000	
		540	2,000	
		640	1,988	1,774
		740	1,433	1,300
		940	845	784

The maximum travel speed of the SKR-type is limited by the critical speed of the ball screw shaft, regardless of the maximum rotational speed (6000 min<sup>-1</sup>) of the motor. Please keep this in mind when using the SKR-type in high-speed applications.

Please contact THK if you are considering using an SKR model at a rate higher than the maximum travel speed noted above.

## 7. Excellent Sliding Capability

Caged Ball Technology also helps the SKR-type eliminate ball-to-ball friction, significantly improving the torque characteristics. It minimizes torque variations, allowing excellent sliding capability.

Item	Value
Shaft diameter/lead	Ø13/10 mm
Shaft rotational speed	60 min <sup>-1</sup>

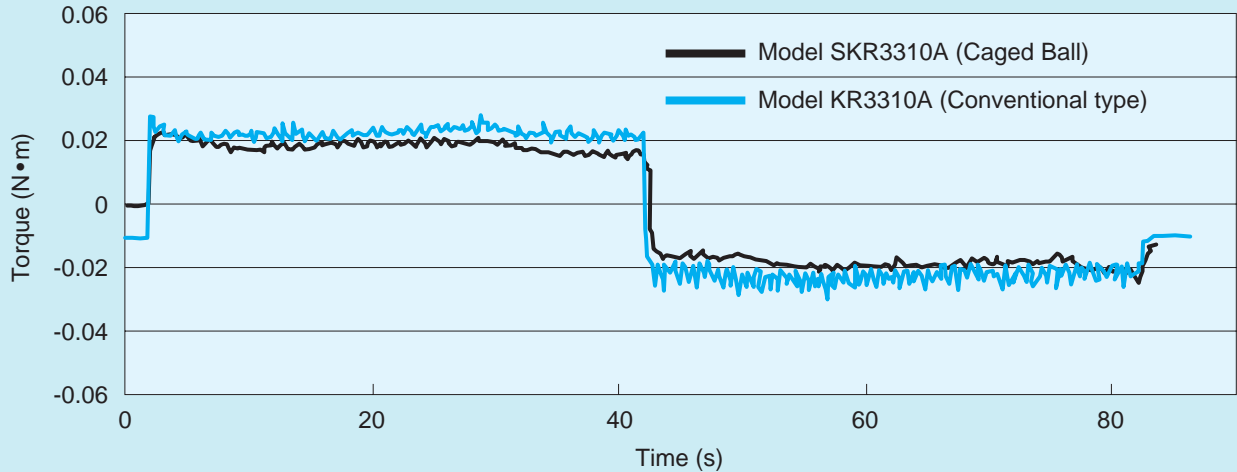


Figure 5 Comparison of Torque Variations between the SKR and KR Types

## 8. Low Noise

The use of Caged Ball Technology in the LM guide and ball screw allows the SKR-type to eliminate the noise caused by the balls colliding. This lets the SKR-type achieve low noise emission and a pleasing sound quality.


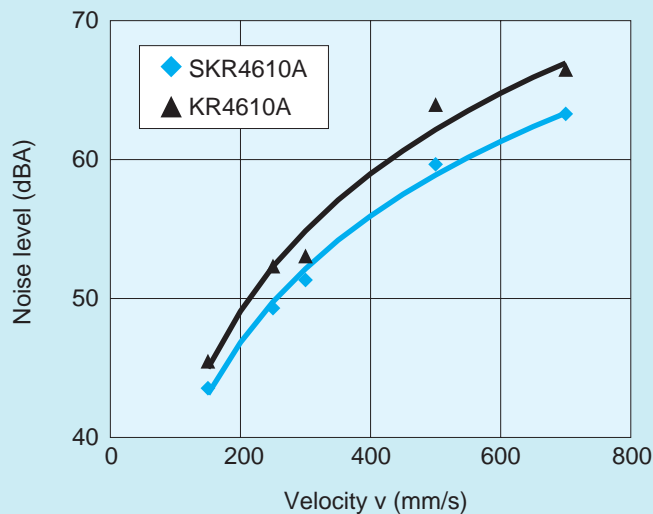



Figure 6 Comparison of the Noise Levels of the SKR4610A and KR4610A Models

**SKR-A**

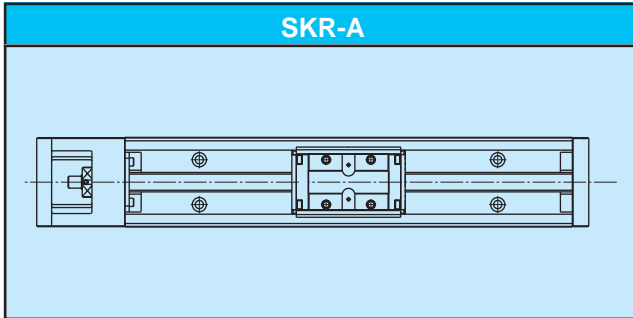


This is the typical SKR model.

**SKR-B**

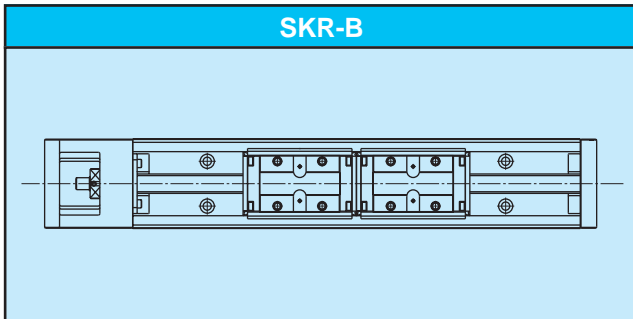


This is the model in which two nut blocks of the SKR-A model are provided to achieve higher rigidity, higher load capacity, and higher precision.

**SKR-C**

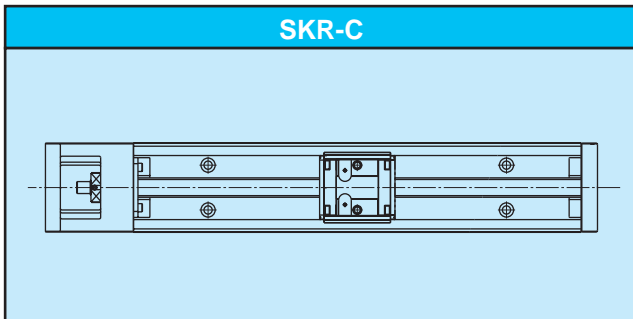

This is the model in which the full length of the SKR-A model nut block is shortened to have a longer stroke. Note that the SKR3320 model has no short type block.

**SKR-D**

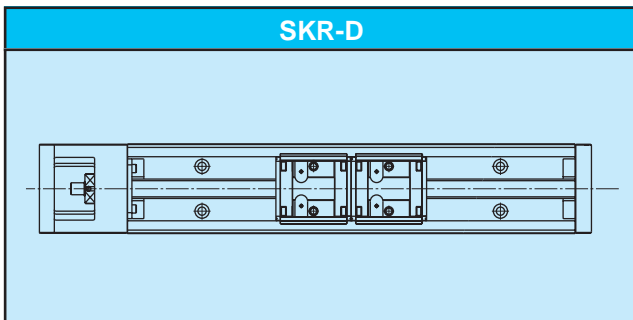


This is the model in which two SKR-C model nut blocks are provided. By placing two blocks, it achieves high rigidity within the application limits. Note that the SKR3320 model has no short type block.

# ● Load Rating and Static Permissible Moment in Each Direction

## ● Load Rating

The SKR-type LM guide actuators with Caged Ball Technology consist of the LM guide, ball screw, and support bearing. Table 4 shows the load rating.

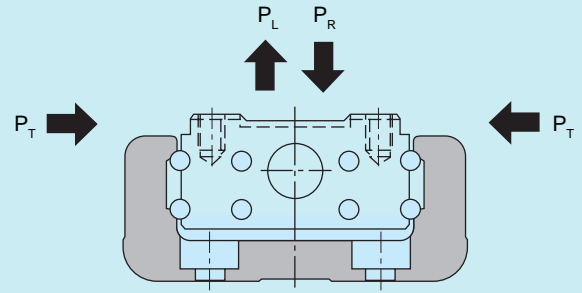

### ● LM guide section unit

The SKR-type can carry loads in all directions, i.e., the radial, reverse-radial, and two lateral directions. The basic load rating is the same in these four directions and their values are shown in Table 4.

### ● Ball screw section unit

The SKR-type can carry loads in the axial direction since it incorporates a ball screw nut in the nut block. The basic load rating value is shown in Table 4.

### ● Support bearing unit

The SKR-type can carry loads in the axial direction since it incorporates an angular bearing in housing A. The basic load rating value is shown in Table 4.

## ● Equivalent Load (LM Guide Unit)

When loads are simultaneously applied to the SKR-type's LM guide in all directions, the equivalent load is obtained by the following equation.

$$P_E = P_R (P_L) + P_T$$

$P_E$  : equivalent load (N)  
 In the radial direction  
 In the reverse-radial direction  
 In the lateral directions

$P_R$  : radial load (N)

$P_L$  : reverse-radial load (N)

$P_T$  : load in the lateral directions (N)

Table 4 Load rating

		Model	SKR33			SKR46	
LM Guide	Basic dynamic load rating C (N)	Long nut block types A, B	17000			39500	
		Short nut block types C, D	11300			28400	
	Basic static load rating C <sub>0</sub> (N)	Long nut block types A, B	20400			45900	
		Short nut block types C, D	11500			28700	
Radial clearance (mm)	Normal grade, high accuracy grade	0 to -0.004			0 to -0.006		
	Precision quality grade	-0.004 to -0.012			-0.006 to -0.016		
Ball Screw	Screw shaft outer diameter (mm)		13			15	
	Lead (mm)		6	10	20	10	20
	Thread minor diameter (mm)		10.8			12.5	
	Ball center-to-center diameter (mm)		13.5			15.75	
	Basic dynamic load rating C <sub>a</sub> (N)		4400	2700	2620	4350	4240
	Basic static load rating C <sub>0a</sub> (N)		6290	3780	3770	6990	7040
Support Bearing	Basic dynamic load rating C <sub>a</sub> (N)		6250			6700	
	Static permissible load P <sub>0a</sub> (N)		2700			3330	

Notes: • The load rating of the LM guide is the load rating per nut block.

• Model SKR3320 has no short type block.

## ● Permissible Moment (LM Guide Unit)

The SKR-type's LM guide section can carry moment loads in all directions, even though it uses only one nut block. Table 5 shows static permissible moment values in the  $M_A$ ,  $M_B$ , and  $M_C$  directions.

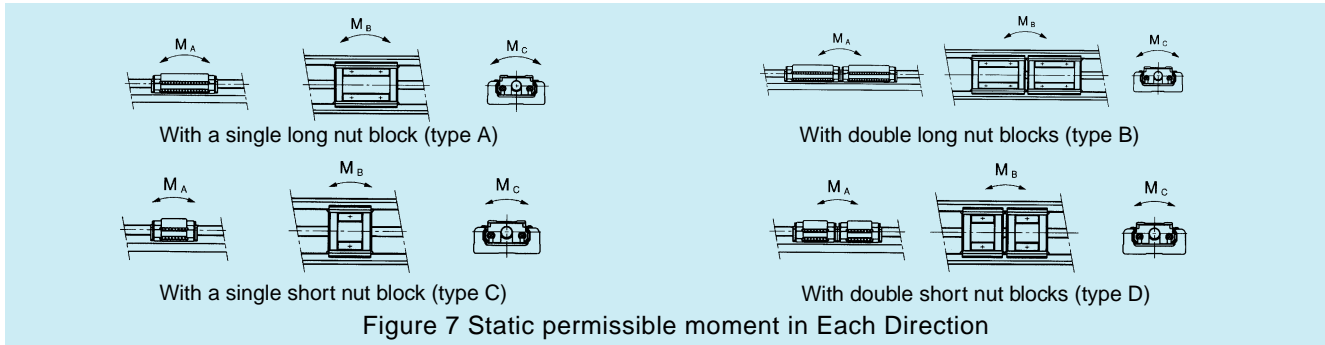


Table 5 Static permissible moment Unit: N·m

Model	Static permissible moment		
	$M_A$	$M_B$	$M_C$
SKR33 - A	173	173	424
SKR33 - B	990	990	848
SKR33 - C	58	58	240
SKR33 - D	390	390	480
SKR46 - A	579	579	1390
SKR46 - B	3240	3240	2780
SKR46 - C	236	236	870
SKR46 - D	1460	1460	1740

Note 1: Symbol A, B, C, or D at the end of the model number represents the type of nut block and the number of them in use.

A: With a single long nut block

B: With double long nut blocks

C: With a single short nut block

D: With double short nuts blocks

Note 2: The values for models SKR-B/D indicate the values when double nut blocks are used in close contact with each other.

## ● Service Life

The SKR-type LM guide actuator with Caged Ball Technology consists of the LM guide, ball screw, and support bearing. The Service Life of each constituting component can be calculated based on the basic dynamic load rating shown in Rated Loads (Table 4 on p. 6).

### ● Calculation of Service Life

#### 1) LM Guide Unit

##### ■ Nominal Life

The nominal life (L) refers to the total traveling distance that 90% of a group of the same LM guides can achieve without flaking (flakes peeling off the metal surface) when these LM guides are individually moved under the same conditions.

The nominal life of the LM guide can be obtained by equation (1).

$$L = \left( \frac{f_c \cdot C}{f_w \cdot P_c} \right)^3 \times 50 \quad (1)$$

L : Nominal life (km)

C : Basic dynamic load rating (N)

$P_c$  : Calculated applied load (N)

$f_w$  : Load factor (see Table 7)

$f_c$  : Contact factor (see Table 6)

- If moment is acted on the SKR-type when using the SKR-A/-C type or the SKR-B/-D type of closely linked double nut blocks, multiply the acting moment by the equivalent coefficient shown in Table 8 to calculate equivalent load.

$$P_m = K \cdot M$$

$P_m$  : Equivalent load (per nut block) (N)

K : Equivalent moment factor

M : Applied moment (N·mm)

(If the SKR-type is used using three or more nut blocks or with the span separated, contact THK.)

Particularly, if moment acts upon the SKR-B or SKR-D, use the following equation:

$$P_m = \frac{K_c \cdot M_c}{2}$$

- If a radial load (P) and moment load act on the SKR-type simultaneously, use the following equation to calculate the life span:

$$P_E = P_m + P$$

$P_E$  : Overall equivalent radial load (N)

### ■ Service Life Time

When the nominal life (L) is obtained, the life span can be calculated by equation (2) if the stroke length and reciprocations of the system per minute are defined.

$$L_h = \frac{L \times 10^6}{2 \cdot \ell_s \cdot n_1 \times 60} \quad (2)$$

$L_h$  : Service life time (h)  
 $\ell_s$  : Stroke length (mm)  
 $n_1$  : Number of reciprocations per minute ( $\text{min}^{-1}$ )

## 2) Ball Screw Unit and Bearing Unit (Fixed side)

### ■ Nominal Life

The nominal life (L) refers to the total number of revolutions that 90% of a group of the same Ball Screw (Bearings) can achieve without flaking when individually operated under the exact conditions. The nominal life of the Ball Screw Unit or bearing unit (fixed side) is calculated by equation (3).

$$L = \left( \frac{C_a}{f_w \cdot F_a} \right)^3 \times 10^6 \quad (3)$$

L : Nominal life (rev.)  
 $C_a$  : Basic dynamic load rating (N)  
 $F_a$  : Axial load (N)  
 $f_w$  : Load factor (see Table 7)

### ■ Service Life Time

When the nominal life (L) is obtained, the life span can be calculated by equation (4) if the stroke length and reciprocations of the system per minute are defined.

$$L_h = \frac{L \cdot \ell}{2 \cdot \ell_s \cdot n_1 \times 60} \quad (4)$$

$L_h$ : Service life time (h)  
 $\ell_s$ : Stroke length (mm)  
 $n_1$ : Number of reciprocations per minute ( $\text{min}^{-1}$ )  
 $\ell$ : Ball Screw lead (mm)

### ● $f_c$ : Contact Factor

If two nut blocks are used and closely linked together in the SKR-B or SKR-D type, multiply the basic load rating by the contact factor shown in Table 6.

Table 6 Contact Factor ( $f_c$ )

Block type	Contact Factor $f_c$
A/C Type	1.0
B/D Type	0.81

### ● $f_w$ : Load Factor

Table 7 shows the load factor.

Table 7 Load Factor ( $f_w$ )

Vibration or Impact	Speed (V)	$f_w$
Faint	Very low: $V \leq 0.25$ m/s	1.0 to 1.2
Weak	Slow: $0.25 < V \leq 1.0$ m/s	1.2 to 1.5
Medium	Medium: $1.0 < V \leq 2.0$ m/s	1.5 to 2.0
Strong	High: $V > 2.0$ m/s	2.0 to 3.5

### ● K: Moment Equivalent Factor (LM guide Unit)

If a moment load is incurred, the load-carrying distribution on the LM guide increases locally. In this case, multiply the moment value with the moment equivalent factor shown in Table 8 to make the load calculation.

$K_A$ ,  $K_B$ , and  $K_C$  show the moment equivalent loads in the  $M_A$ ,  $M_B$ , and  $M_C$  directions respectively.

Table 8 Moment Equivalent Factor (K)

Model No.	$K_A$	$K_B$	$K_C$
SKR33 - A	$1.42 \times 10^{-1}$	$1.42 \times 10^{-1}$	$5.05 \times 10^{-2}$
SKR33 - B	$2.47 \times 10^{-2}$	$2.47 \times 10^{-2}$	$5.05 \times 10^{-2}$
SKR33 - C	$2.39 \times 10^{-1}$	$2.39 \times 10^{-1}$	$5.05 \times 10^{-2}$
SKR33 - D	$3.54 \times 10^{-2}$	$3.54 \times 10^{-2}$	$5.05 \times 10^{-2}$
SKR46 - A	$9.51 \times 10^{-2}$	$9.51 \times 10^{-2}$	$3.46 \times 10^{-2}$
SKR46 - B	$1.70 \times 10^{-2}$	$1.70 \times 10^{-2}$	$3.46 \times 10^{-2}$
SKR46 - C	$1.46 \times 10^{-1}$	$1.46 \times 10^{-1}$	$3.46 \times 10^{-2}$
SKR46 - D	$2.36 \times 10^{-2}$	$2.36 \times 10^{-2}$	$3.46 \times 10^{-2}$

$K_A$ : moment equivalent factor in the  $M_A$  direction

$K_B$ : moment equivalent factor in the  $M_B$  direction

$K_C$ : moment equivalent factor in the  $M_C$  direction

Note: For the SKR-B and SKR-D types, the moment equivalent factor shows the value applied when two nut blocks are closely linked together.

# Accuracy Standards

The tables below show the accuracy standards of the SKR-type.

Table 9 Accuracy Standards

Table 9-1 Normal Grade (No Symbol)

Unit: mm

Model No.	Rail Length	Positioning Repeatability	Positioning Accuracy	Running of Parallelism	Backlash	Starting Torque (N-cm)
SKR33	150	± 0.010	No standard defined	No standard defined	0.020	7
	200					
	300					
	400					
	500					
	600					
	700					
SKR46	340	± 0.010	No standard defined	No standard defined	0.020	10
	440					
	540					
	640					
	740					
	940					

Table 9-2 High-accuracy Grade (H)

Unit: mm

Model No.	Rail Length	Positioning Repeatability	Positioning Accuracy	Running of Parallelism	Backlash	Starting Torque (N-cm)							
SKR33	150	± 0.005	0.060	0.025	0.020	7							
	200												
	300												
	SKR46		400	± 0.005			0.100	0.035	0.020	10			
			500										
			SKR33				600	0.120			0.040	0.020	7
							700						
SKR46	340	± 0.005	0.100	0.035	0.020	10							
	440												
	540												
	SKR33		640	0.120			0.040	0.020	7				
			740										
			940										

Table 9-3 Precision Grade (P)

Unit: mm

Model No.	Rail Length	Positioning Repeatability	Positioning Accuracy	Running of Parallelism	Backlash	Starting Torque (N-cm)							
SKR33	150	± 0.003	0.020	0.010	0.003	15							
	200												
	300												
	SKR46		400	± 0.003			0.025	0.015	0.003	15			
			500										
			SKR33				600	0.030			0.020	0.003	15
							700						
SKR46	340	± 0.003	0.025	0.015	0.003	15							
	440												
	540												
	SKR33		640	0.030		0.020	0.003	17					
			740										

The evaluation method complies with THK standards.

The starting torque shows a value achieved when THK AFB-LF grease is used with the product.

If high-viscosity grease, such as vacuum grease or clean room grease, is used, there are cases where the criteria value is exceeded. In such a case, exercise care when selecting the motor.

# Accuracy Standards

The precision of the SKR is determined by repetitive positioning repeatability, positioning accuracy, backlash, and running parallelism.

## Positioning Repeatability

Repeat the measurement seven times from the same direction to a certain point. Divide the maximum difference by two. Conduct the same test at three points, the “center” of the stroke, and on both the approximate maximum and minimum positions of travel. Add  $\pm$  to the largest difference. This accuracy is generally measured with a laser interferometer and sometimes with a dial-gauge. (Taken from THK Accuracy & Measurement Standards.)

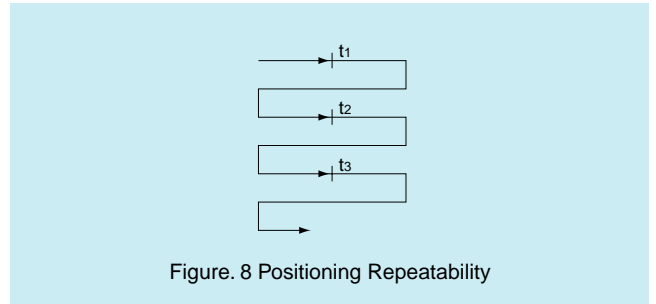


Figure. 8 Positioning Repeatability

## Positioning Accuracy

The maximum stroke is taken as the reference length, and the maximum error between the actual distance traveled from the reference position and the instructed value is expressed as an absolute value.

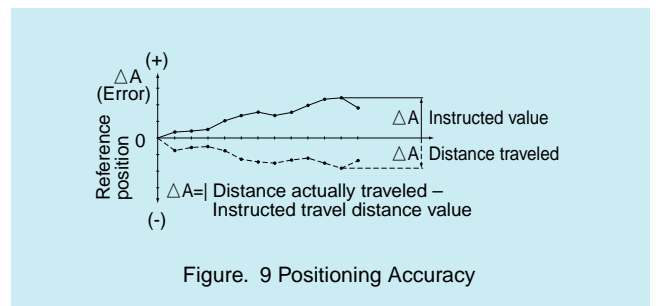


Figure. 9 Positioning Accuracy

## Backlash

Lock the actuator’s carriage into a fixed position via the actuator’s drive mechanism. Do not lock the actuator’s carriage by “fixing” it rigidly. Push the carriage from one direction with a predetermined external force using a push/pull gauge. Zero out the dial-gauge while the axial force is being applied-release the external force and read the dial-gauge. Measure at three separate points along the stroke, at the center and the end of travel positions. Backlash is the maximum measured value.

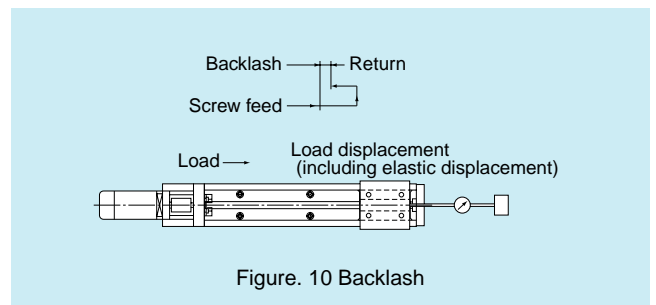


Figure. 10 Backlash

## Running of Parallelism

A straightedge is placed on a leveling plate mounted with the SKR, and parallelism is measured over almost the entire distance traveled using a test indicator. The maximum error in the reading within the distance traveled is taken as the measurement value.


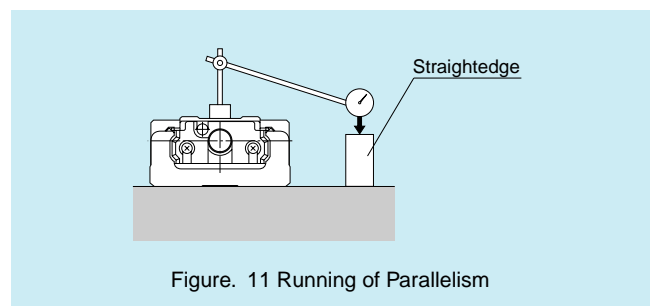


Figure. 11 Running of Parallelism

# SKR33 □□□ Standard Type

SKR33 □□ A (with a Single Long Block)

SKR33 □□ B (with Two Long Blocks)

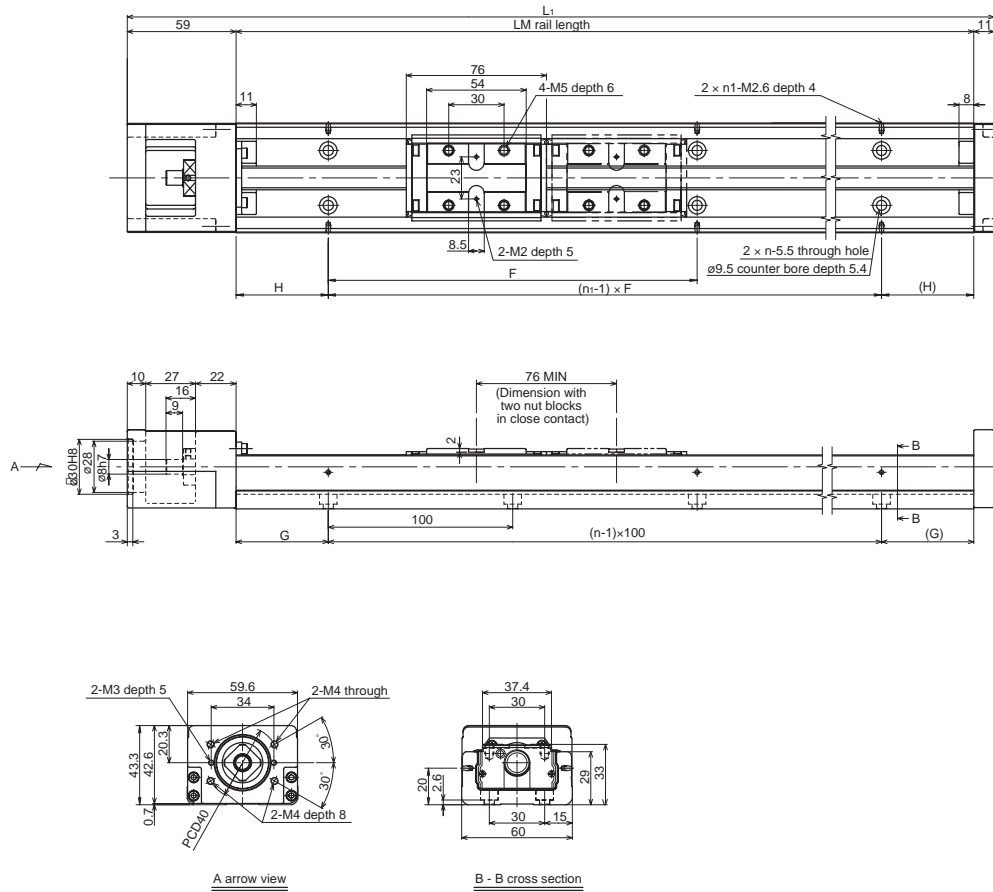

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	F (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type A	Type B						Type A	Type B
150	220	55	—	25	25	100	2	2	1.7	—
200	270	105	—	50	50	100	2	2	2.1	—
300	370	205	129	50	50	200	3	2	2.8	3.1
400	470	305	229	100	50	200	4	2	3.5	3.8
500	570	405	329	50	50	200	5	3	4.2	4.5
600	670	505	429	100	50	200	6	3	5.0	5.3
700	770	605	529	50	50	200	7	4	5.7	6.0

The available stroke range of SKR33□□B shows a value applicable when the product is used with two long type blocks closely linked together.

## How to Interpret the Model Number


11  
**SKR33 20 A + 700L P 0 - 0 0 0 0**  

1
2
3
4
5
6
7
8
9
10

- |   |                                 |                               |                              |
|---|---------------------------------|-------------------------------|------------------------------|
| <b>1</b> Model number                               | <b>2</b> Ball screw lead (mm)   | <b>3</b> Type of nut block    | <b>4</b> LM rail length (mm) |
| <b>5</b> Accuracy grade                             | <b>6</b> With/without a motor   | <b>7</b> With/without a cover |                              |
| <b>8</b> Sensor specifications (see page 19)        | <b>9</b> Type of housing – A: 0 |                               |                              |
| <b>10</b> Type of intermediate flange (see page 20) | <b>11</b> Control number        |                               |                              |

SKR33 □□ C (with a Single Short Block)

SKR33 □□ D (with Two Short Blocks)

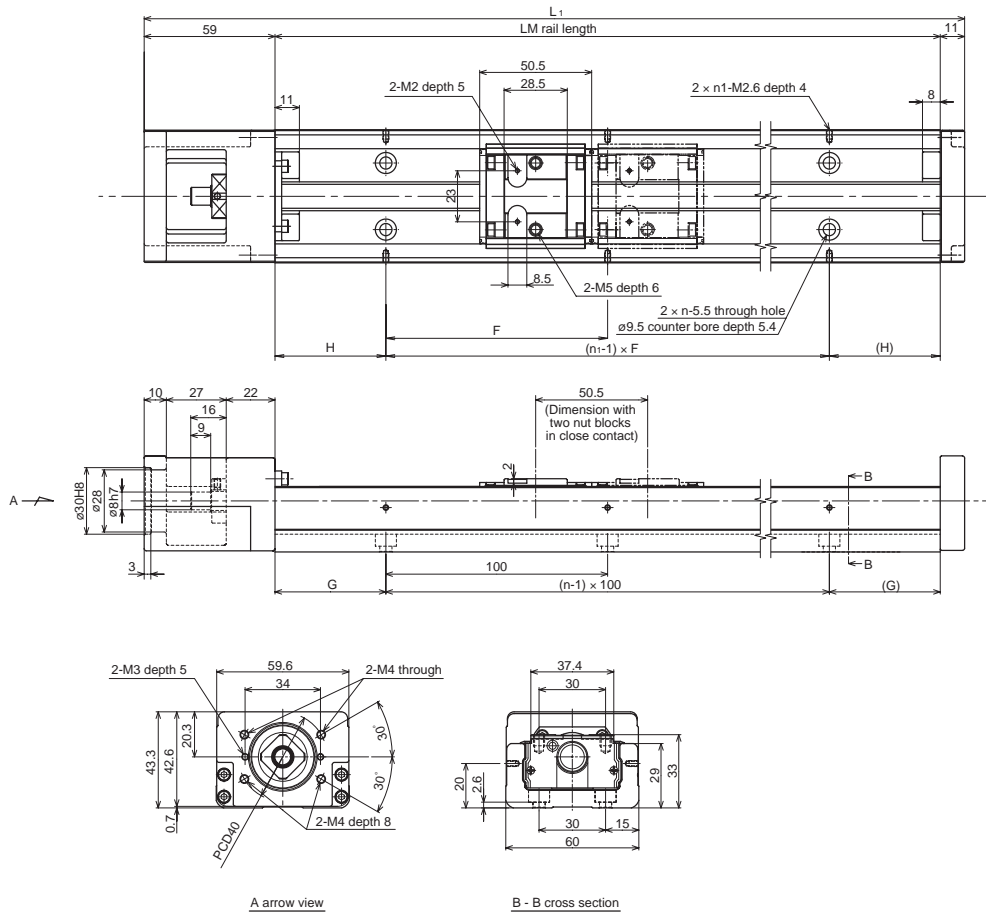

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	F (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type C	Type D						Type C	Type D
150	220	80.5	30	25	25	100	2	2	1.6	1.8
200	270	130.5	80	50	50	100	2	2	2.0	2.1
300	370	230.5	180	50	50	200	3	2	2.7	2.8
400	470	330.5	280	100	50	200	4	2	3.4	3.6
500	570	430.5	380	50	50	200	5	3	4.1	4.3
600	670	530.5	480	100	50	200	6	3	4.8	5.0
700	770	630.5	580	50	50	200	7	4	5.5	5.7


The available stroke range of SKR33□□D shows a value applicable when the product is used with two short type blocks closely linked together.

5 Accuracy grade	Description	Normal grade	High-accuracy grade	Precision grade
	Symbol	No Symbol	H	P
6 Provision of Motor	Description	Not provided		Provided (assembled at THK)
	Symbol	0		1
7 Provision of Cover	Description	Not provided		Provided
	Symbol	0		1

# SKR33 □□□ (with the Cover)

SKR33 □□ A (with a Single Long Block)

SKR33 □□ B (with Two Long Blocks)

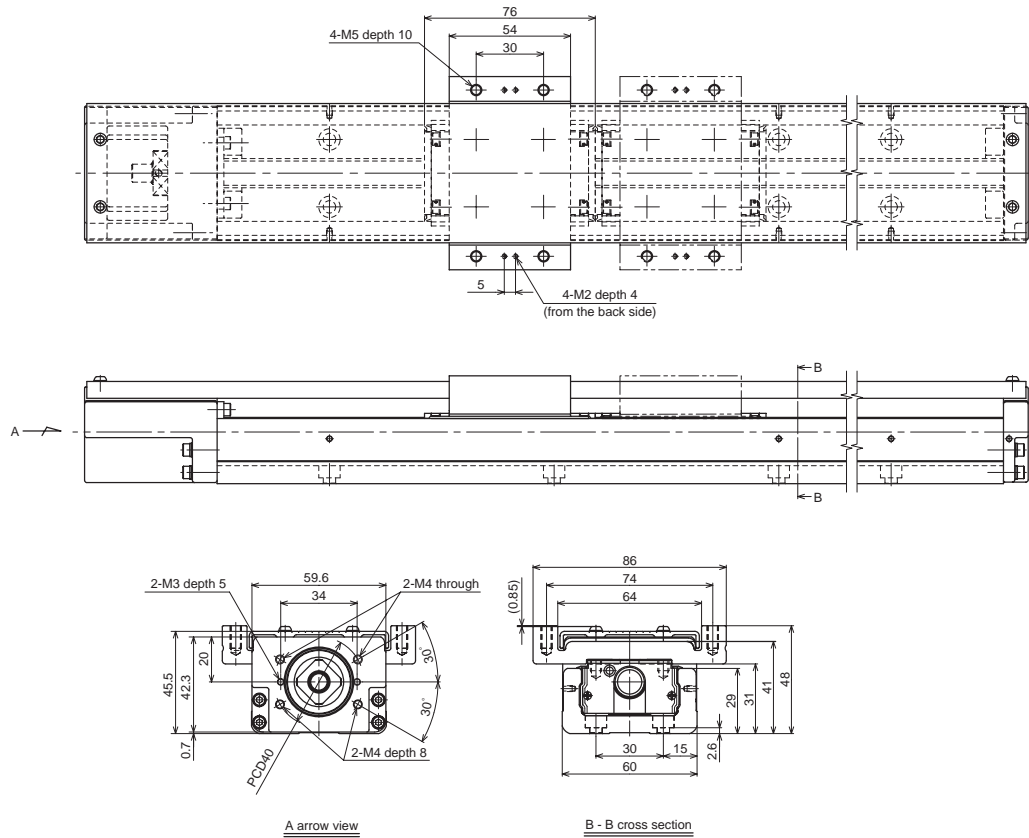

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	F (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type A	Type B						Type A	Type B
150	220	55	—	25	25	100	2	2	1.9	—
200	270	105	—	50	50	100	2	2	2.3	—
300	370	205	129	50	50	200	3	2	3.1	3.5
400	470	305	229	100	50	200	4	2	3.8	4.2
500	570	405	329	50	50	200	5	3	4.6	5.0
600	670	505	429	100	50	200	6	3	5.3	5.7
700	770	605	529	50	50	200	7	4	6.1	6.5

The available stroke range of SKR33□□B shows a value applicable when the product is used with two long type blocks closely linked together.

## How to Interpret the Model Number



11  
**SKR33** **20** **A** + **700L** **P** **0** - **0** **0** **0** **0**  

1
2
3
4
5
6
7
8
9
10

- |   |                                 |                               |                              |
|---|---------------------------------|-------------------------------|------------------------------|
| <b>1</b> Model number                               | <b>2</b> Ball screw lead (mm)   | <b>3</b> Type of nut block    | <b>4</b> LM rail length (mm) |
| <b>5</b> Accuracy grade                             | <b>6</b> With/without a motor   | <b>7</b> With/without a cover |                              |
| <b>8</b> Sensor specifications (see page 19)        | <b>9</b> Type of housing – A: 0 | <b>11</b> Control number      |                              |
| <b>10</b> Type of intermediate flange (see page 20) |                                 |                               |                              |

SKR33 □□ C (with a Single Short Block)

SKR33 □□ D (with Two Short Blocks)

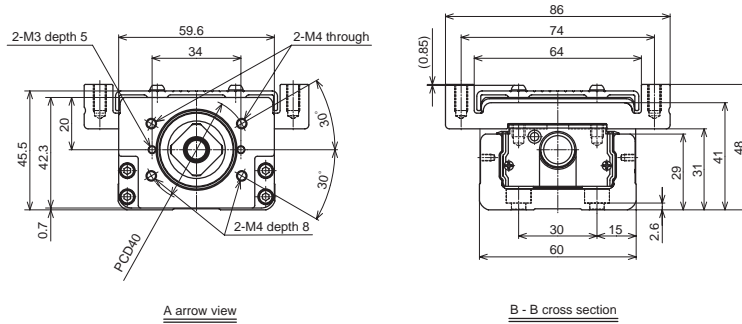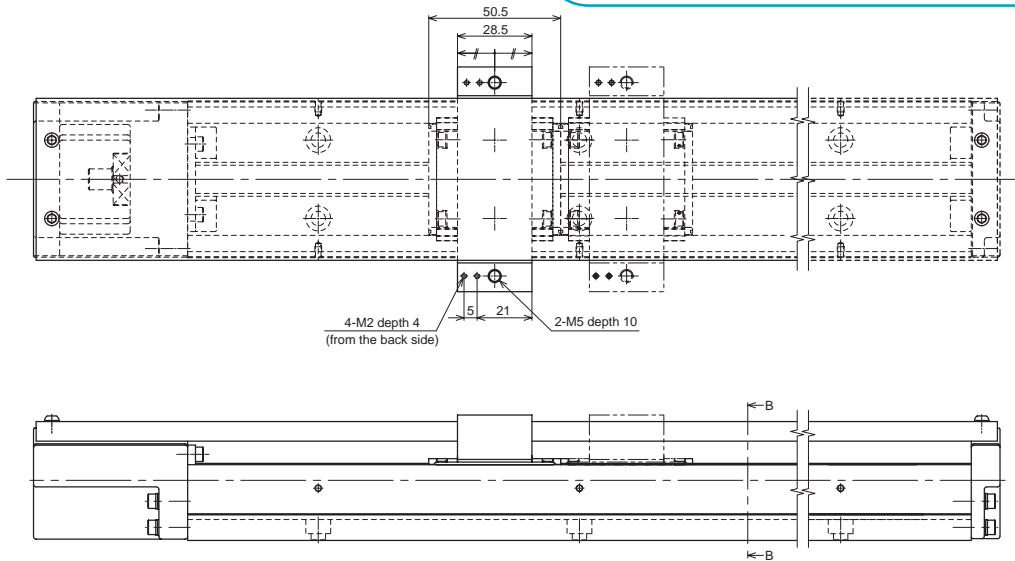

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	F (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type C	Type D						Type C	Type D
150	220	80.5	30	25	25	100	2	2	1.8	2.0
200	270	130.5	80	50	50	100	2	2	2.2	2.3
300	370	230.5	180	50	50	200	3	2	2.9	3.1
400	470	330.5	280	100	50	200	4	2	3.7	3.8
500	570	430.5	380	50	50	200	5	3	4.4	4.6
600	670	530.5	480	100	50	200	6	3	5.2	5.3
700	770	630.5	580	50	50	200	7	4	5.9	6.1


The available stroke range of SKR33□□D shows a value applicable when the product is used with two short type blocks closely linked together.

	Description	Normal grade	High-accuracy grade	Precision grade
		No Symbol	H	P
5 Accuracy grade	Description	Normal grade	High-accuracy grade	Precision grade
	Symbol	No Symbol	H	P
6 Provision of Motor	Description	Not provided		Provided (assembled at THK)
	Symbol	0		1
7 Provision of Cover	Description	Not provided		Provided
	Symbol	0		1

# SKR46 Standard Type

SKR46  A (with a Single Long Block)

SKR46  B (with Two Long Blocks)

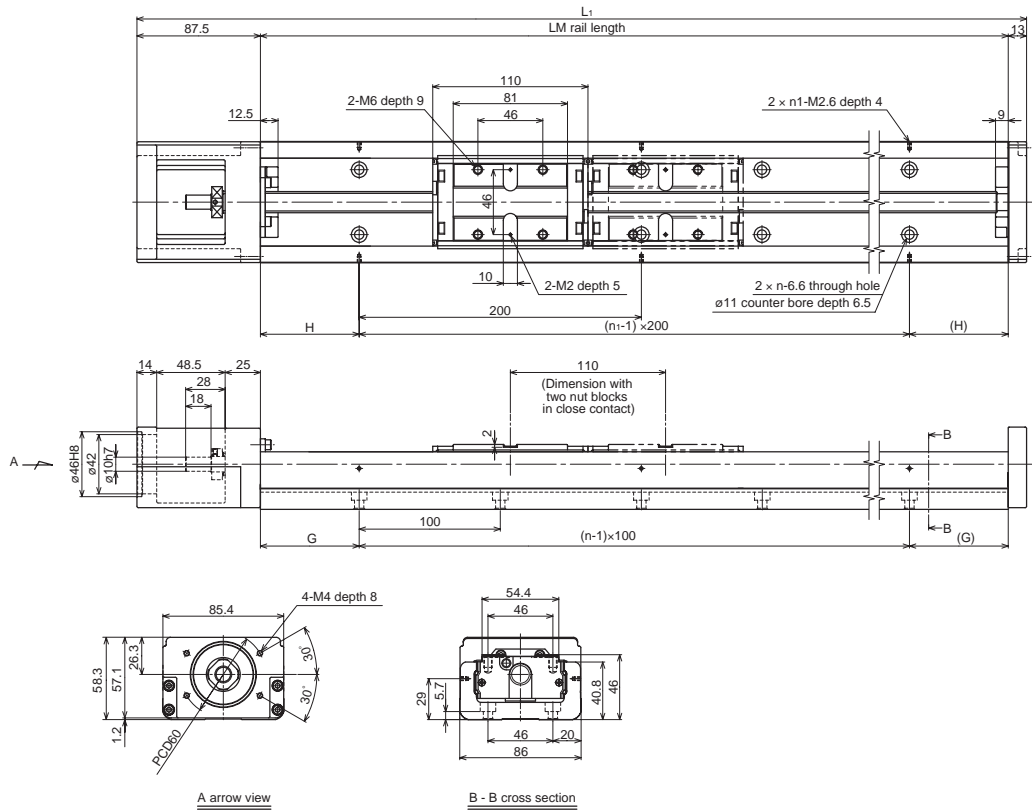

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type A	Type B					Type A	Type B
340	440.5	208.5	98.5	70	70	3	2	6.4	7.4
440	540.5	308.5	198.5	20	70	4	3	7.8	8.7
540	640.5	408.5	298.5	70	70	5	3	9.2	10.1
640	740.5	508.5	398.5	20	70	6	4	10.6	11.5
740	840.5	608.5	498.5	70	70	7	4	12.0	12.9
940	1040.5	808.5	698.5	70	70	9	5	14.8	15.7

The available stroke range of SKR46  B shows a value applicable when the product is used with two long type blocks closely linked together.

## How to Interpret the Model Number


11  
**SKR46 20 A + 940L P 0 - 0 0 0 0**  

1
2
3
4
5
6
7
8
9
10

- |   |                                 |                               |                              |
|---|---------------------------------|-------------------------------|------------------------------|
| <b>1</b> Model number                               | <b>2</b> Ball screw lead (mm)   | <b>3</b> Type of nut block    | <b>4</b> LM rail length (mm) |
| <b>5</b> Accuracy grade                             | <b>6</b> With/without a motor   | <b>7</b> With/without a cover |                              |
| <b>8</b> Sensor specifications (see page 19)        | <b>9</b> Type of housing – A: 0 |                               |                              |
| <b>10</b> Type of intermediate flange (see page 20) | <b>11</b> Control number        |                               |                              |

SKR46 □□ C (with a Single Short Block)

SKR46 □□ D (with Two Short Blocks)

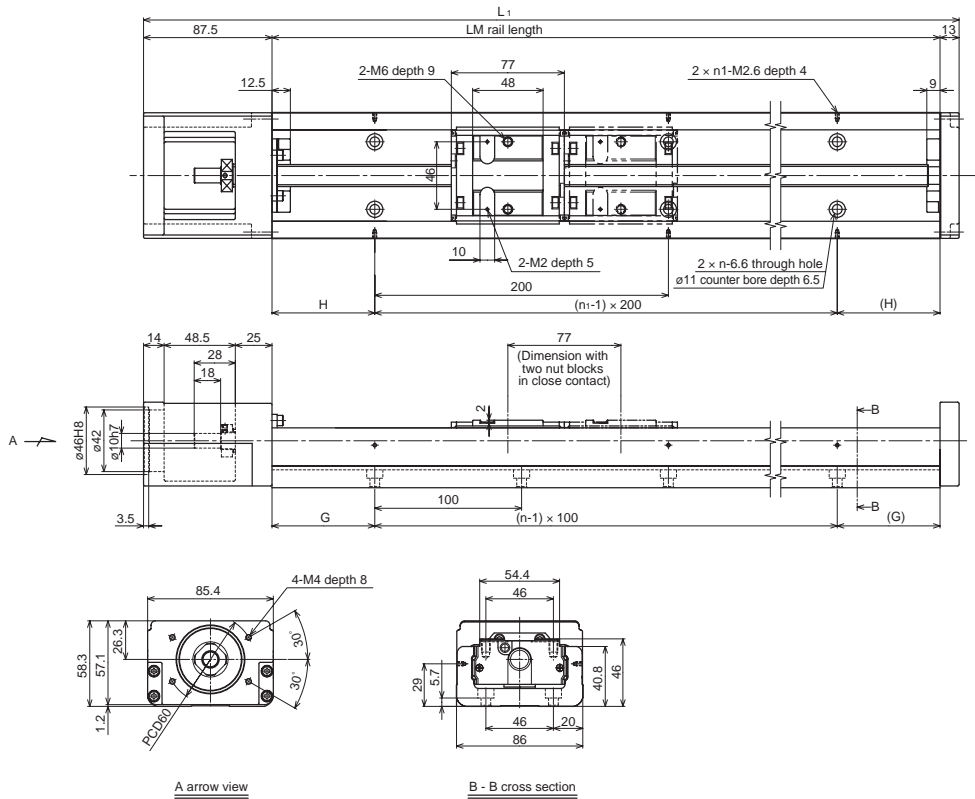

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type A	Type B					Type A	Type B
340	440.5	241.5	164.5	70	70	3	2	6.1	6.7
440	540.5	341.5	264.5	20	70	4	3	7.5	8.1
540	640.5	441.5	364.5	70	70	5	3	8.9	9.5
640	740.5	541.5	464.5	20	70	6	4	10.3	10.8
740	840.5	641.5	564.5	70	70	7	4	11.7	12.2
940	1040.5	841.5	764.5	70	70	9	5	14.5	15.0


The available stroke range of SKR46□□D shows a value applicable when the product is used with two short type blocks closely linked together.

5 Accuracy grade	Description	Normal grade	High-accuracy grade	Precision grade
		Symbol	No Symbol	H
6 Provision of Motor	Description	Not provided		Provided (assembled at THK)
	Symbol	0		1
7 Provision of Cover	Description	Not provided		Provided
	Symbol	0		1

# SKR46 □□□ (with the Cover)

SKR46 □□ A (with a Single Long Block)

SKR46 □□ B (with Two Long Blocks)

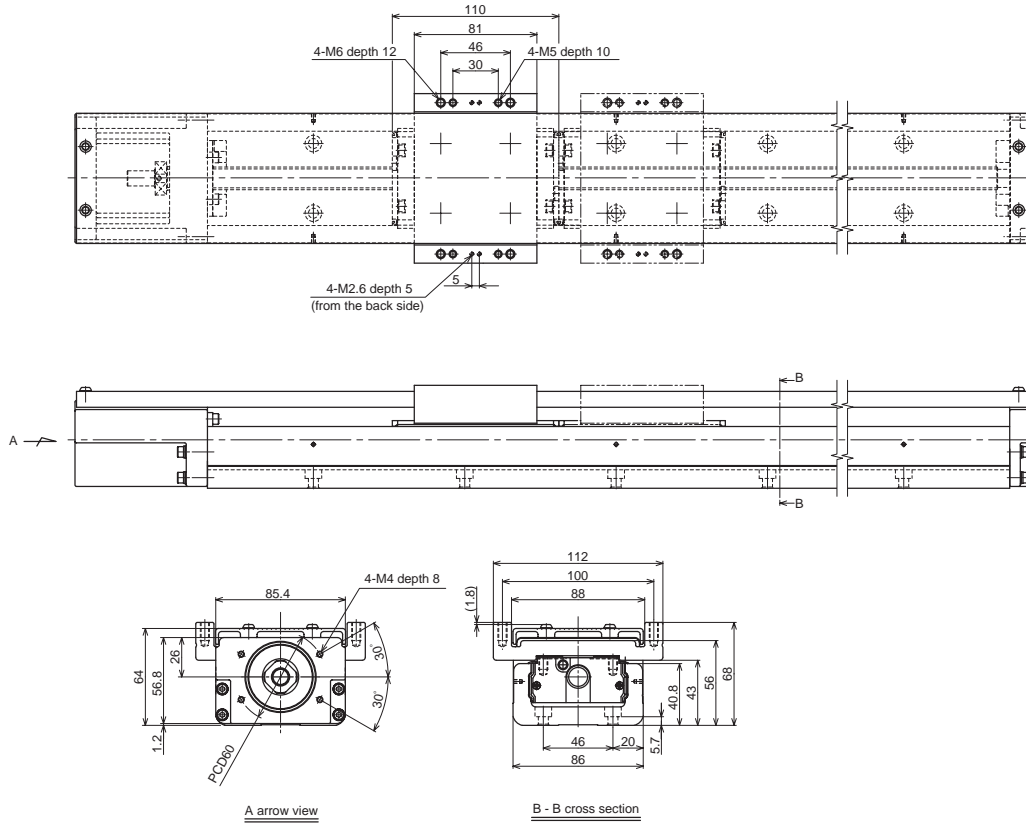

LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type A	Type B					Type A	Type B
340	440.5	208.5	98.5	70	70	3	2	7.1	8.3
440	540.5	308.5	198.5	20	70	4	3	8.6	9.8
540	640.5	408.5	298.5	70	70	5	3	10.0	11.3
640	740.5	508.5	398.5	20	70	6	4	11.5	12.7
740	840.5	608.5	498.5	70	70	7	4	13.0	14.2
940	1040.5	808.5	698.5	70	70	9	5	16.0	17.2

The available stroke range of SKR46□□B shows a value applicable when the product is used with two long type blocks closely linked together.

## How to Interpret the Model Number


11  
**SKR46 20 A + 940L P 0 - 0 0 0 0**  

1
2
3
4
5
6
7
8
9
10

- |   |                                 |                               |                              |
|---|---------------------------------|-------------------------------|------------------------------|
| <b>1</b> Model number                               | <b>2</b> Ball screw lead (mm)   | <b>3</b> Type of nut block    | <b>4</b> LM rail length (mm) |
| <b>5</b> Accuracy grade                             | <b>6</b> With/without a motor   | <b>7</b> With/without a cover |                              |
| <b>8</b> Sensor specifications (see page 19)        | <b>9</b> Type of housing – A: 0 |                               |                              |
| <b>10</b> Type of intermediate flange (see page 20) | <b>11</b> Control number        |                               |                              |

SKR46 □□ C (with a Single Short Block)

SKR46 □□ D (with Two Short Blocks)

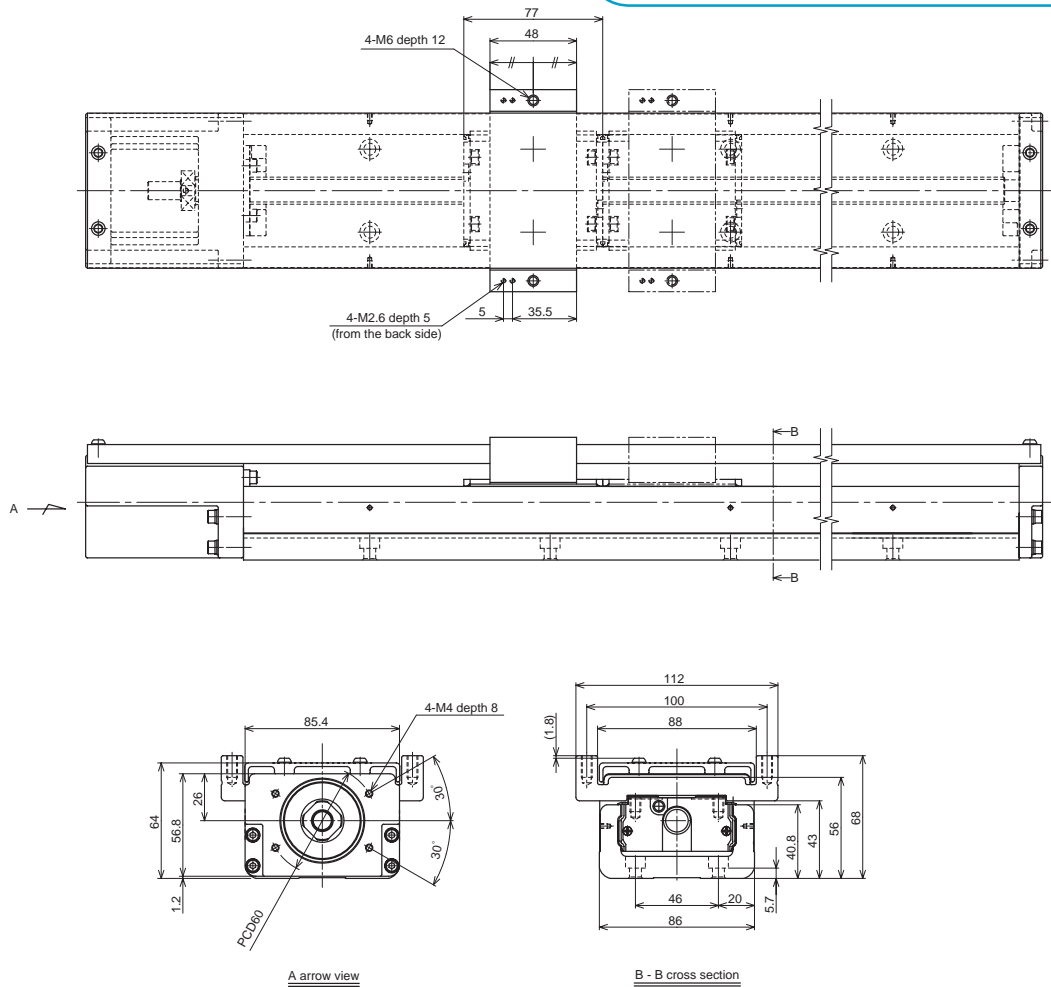


LM Rail Length (mm)	Overall Length L <sub>1</sub> (mm)	Available Stroke Range (mm)		H (mm)	G (mm)	n	n <sub>1</sub>	Overall main unit mass (kg)	
		Type C	Type D					Type C	Type D
340	440.5	241.5	164.5	70	70	3	2	6.6	7.4
440	540.5	341.5	264.5	20	70	4	3	8.1	8.9
540	640.5	441.5	364.5	70	70	5	3	9.6	10.3
640	740.5	541.5	464.5	20	70	6	4	11.0	11.8
740	840.5	641.5	564.5	70	70	7	4	12.5	13.3
940	1040.5	841.5	764.5	70	70	9	5	15.5	16.3

The available stroke range of SKR46□□D shows a value applicable when the product is used with two short type blocks closely linked together.

5 Accuracy grade	Description	Normal grade	High-accuracy grade	Precision grade
		Symbol	No Symbol	H
6 Provision of Motor	Description	Not provided		Provided (assembled at THK)
	Symbol	0		1
7 Provision of Cover	Description	Not provided		Provided
	Symbol	0		1

## Seals

The SKR is equipped with an end seal and side seal as standard for dust-proofing.

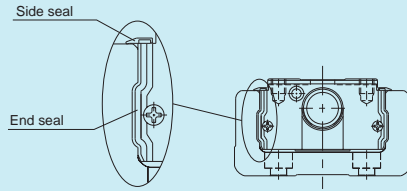

## Sensors

Proximity sensors and photosensors are available as options for the SKR33 and SKR46. When a customer specifies a model with a sensor, specially designed sensor rails and sensor dogs are supplied with the product.

### ● Sensor Specifications

Symbol	Description	Type	Accessory
0	None	—	—
1	With sensor rail	—	Mounting screw
2	3 photosensors	EE-SX671 (OMRON)	Mounting screw/nut, detecting plate, sensor rail, mounting plate, connector (EE-1001)
4	3 proximity sensors Normally OPEN	GL-12F (SUNX)	Mounting screw/nut, detecting plate, sensor rail, fixture (MS-GL12)
5	3 proximity sensors Normally OPEN	GXL-N12F (SUNX)	Mounting screw/nut, detecting plate, sensor rail, fixture (MS-GXL12)
6	3 photosensors	EE-SX674 (OMRON)	Mounting screw/nut, detecting plate, sensor rail, mounting plate, connector (EE-1001)
7	3 proximity sensors Normally OPEN	APM-D3A1-001(YAMATAKE)	Mounting screw/nut, detecting plate, sensor rail
8	3 proximity sensors Normally OPEN	GL-N12F (SUNX)	Mounting screw/nut, detecting plate, sensor rail
9	3 proximity sensors Normally CLOSED	GL-N12FB (SUNX)	Mounting screw/nut, detecting plate, sensor rail
A	3 proximity sensors Normally CLOSED	GXL-N12FB (SUNX)	Mounting screw/nut, detecting plate, sensor rail, fixture (MS-GXL12)
B	3 proximity sensors Normally CLOSED	APM-D3B1-003(YAMATAKE)	Mounting screw/nut, detecting plate, sensor rail
C	Proximity sensor Normally OPEN (1), Normally CLOSED (2)	GL-N12F (1 unit), GL-N12FB (2 units)	Mounting screw/nut, detecting plate, sensor rail
D	Proximity sensor Normally OPEN (1), Normally CLOSED (2)	GXL-N12F (1 unit), GXL-N12FB (2 units)	Mounting screw/nut, detecting plate, sensor rail, fixture (MS-GXL12)
E	Proximity sensor Normally OPEN (1), Normally CLOSED (2)	APM-D3A1-001 (1 unit), APM-D3B1-003 (2 units)	Mounting screw/nut, detecting plate, sensor rail
F	Proximity sensor Normally OPEN (1), Normally CLOSED (2) (PNP OUTPUT)	GXL-N12F-P (1 unit), GXL-N12FB-P (2 units)	Mounting screw/nut, detecting plate, sensor rail, fixture (MS-GXL12)


## ● Sensors

Proximity sensors	GL-12 (SUNX)	3 units
	GL-N12F (B) (SUNX)	3 units
	GXL-N12F (B) (SUNX)	3 units
	APM-D3A1-001 (Yamatake) (APM-D3B1-003)	3 units
Photosensors	EE-SX671 (OMRON)	3 units
	EE-SX674 (OMRON)	3 units
Connectors	EE-1001 (OMRON)	3 units


Note: Connectors come as standard with photosensors.

## ● Sensor rails

It is also possible to install a sensor rail only.

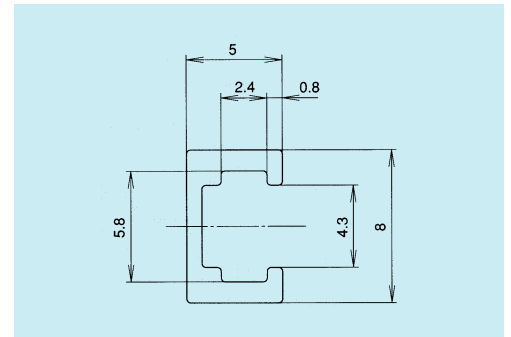


### Proximity sensors GL-12F, GL-N12F (B), and GXL-N12F (B) (SUNX)

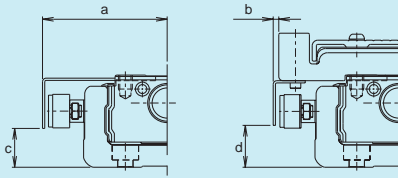


Model	Unit: mm			
	a	b	c	d
SKR33	44.7	2	13.8	14
SKR46	57.7	1.8	24.8	22

### Proximity sensors APM-D3A1 and APM-D3B1 (Yamatake)

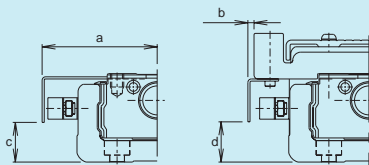


Model	Unit: mm			
	a	b	c	d
SKR33	43.05	0.3	14.8	15
SKR46	56.2	0.2	26.8	22

### Photosensor EE-SX671 (OMRON)

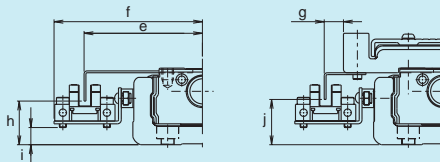

Model	Unit: mm					
	e	f	g	h	i	j
SKR33	51.1	63.6	8.3	18.8	7.4	19.5
SKR46	64.1	76.6	8.3	29.8	16.4	26.5

### Photosensor EE-SX674 (OMRON)

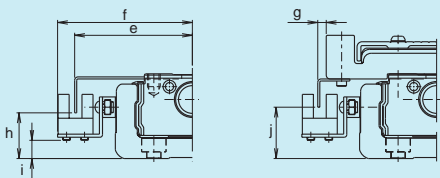

Model	Unit: mm					
	e	f	g	h	i	j
SKR33	45.9	52.1	3.3	17.8	7.1	20
SKR46	58.9	65.1	3.2	28.8	16.1	27

# Intermediate Flanges

## Applicable Motors and Applicable Intermediate Flanges

The SKR-type is provided with intermediate flanges so that a variety of motors can be installed. The table below shows the control number of the intermediate flanges meeting the applicable motors on a model number basis. At the time of order, specify the intermediate flange control number.


Table11 Table of Motors Used and Corresponding Motor Brackets

Motor model No.			Flange angle	SKR33	SKR46			
Servomotor	Yaskawa Electric	Σ-II	SGMAH-A3 (30W)	□40	0H	0F		
			SGMAH-A5 (50W)		0H	0F		
			SGMAH-01 (100W)		0H	0F		
			SGMPH-01 (100W)		-	04		
			SGMAH-02 (200W)		□60	-	04	
			SGMAH-04 (400W)		-	04		
	Mitsubishi Electric	MELSERVO	J2 Super	HC-MFS 053 (50W)	□40	0H	0F	
				HC-KFS 053 (50W)		0H	0F	
				HC-MFS 13 (100W)		0H	0F	
				HC-KFS 13 (100W)		0H	0F	
				HC-MFS 23 (200W)		□60	-	04
				HC-KFS 23 (200W)			-	04
				HC-MFS 43 (400W)			-	04
				HC-KFS 43 (400W)			-	04
	Matsushita Electric	MINAS A	MSMA 3A (30W)	□38	0K	0G		
			MSMA 5A (50W)		0K	0G		
			MSMA 01 (100W)		0K	0G		
			MQMA 01 (100W)		□60	-	03	
			MSMA 02 (200W)			-	03	
			MSMA 04 (400W)			-	03	
	SANYO Electric	SANMOTION Q1	Q1AA04003D (30W)	□40	0H	0F		
			Q1AA04005D (50W)		0H	0F		
			Q1AA04010D (100W)		0H	0F		
			Q1AA06020D (200W)		□60	-	04	
			Q1AA06040D (400W)			-	04	
	OMRON	OMNUC W	R88M-W03030 (30W)	□40	0H	0F		
			R88M-W05030 (50W)		0H	0F		
			R88M-W10030 (100W)		0H	0F		
R88M-W20030 (200W)			□60		-	04		
R88M-W40030 (400W)					-	04		
Fanuc	βis series	β0.2/5000is (50W)	□40	0H	0F			
		β0.3/5000is (100W)		0H	0F			
		β0.4/5000is (125W)		□60	-	04		
		β0.5/5000is (200W)			-	04		
		β1/5000is (400W)			-	04		
Stepping motor	Oriental Motor	αStep	AS 46, ASC46	□42	0I	-		
			AS 6□, ASC66	□60	0G	01		
		5 phase	RK	RK54□	□42	0I	-	
				RK56□	□60	0G	01	
		2 phase	UMK	UMK24□	□42	0I	-	
				UMK26□	□56.4	0F	-	
			CSK	CSK24□	□42	0I	-	
				CSK26□	□56.4	0F	-	


Note1) The symbols in the table each indicate the last two digits of an administration number.

Note2) For the coupling for mounting a motor in the table, contact THK.


# Dimensions of the Intermediate Flanges

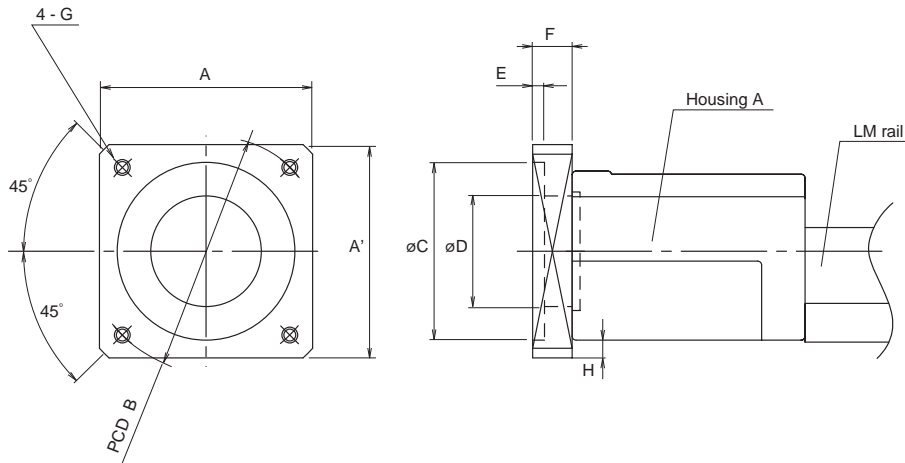

	Control number	A × A'	B	C	D	E	F	G	H
SKR33	0B	54 × 54	60	50	28	3	10	M4	4
	0H	42 × 40	46	30	28	3	10	M4	—
	0K	42 × 38	45	30	28	3.5	10	M3	—
SKR46	02	62 × 60	60	50	42	3.5	10	M4	—
	03	62 × 60	70	50	42	3.5	10	M4	—
	04	62 × 60	70	50	42	4	10	M5	—
	0A	76 × 76	90	70	42	3.5	12	M5	6
	0F	62 × 53	46	30	—	—	10	M4	—
	0G	62 × 53	45	30	—	—	10	M3	—

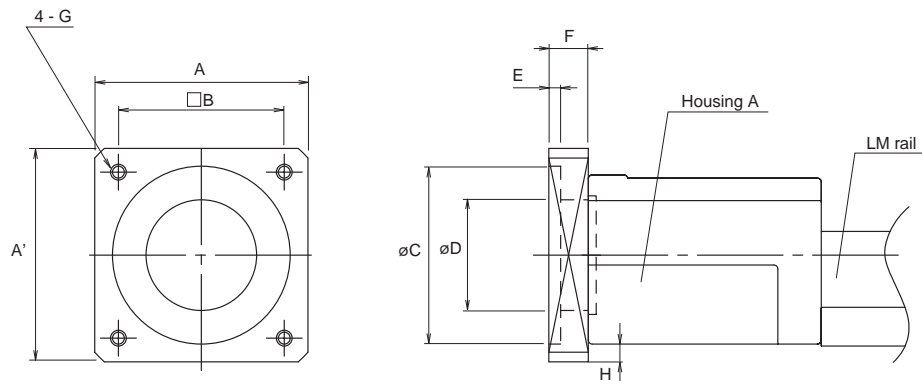

	Control number	A × A'	B	C	D	E	F	G	H
SKR33	0F	56.4 × 56.4	47.14	38.1	28	2	10	M4	5.2
	0G	60 × 60	50	36	28	2	10	M4	7
SKR46	01	62 × 60	50	36	—	—	10	M4	—

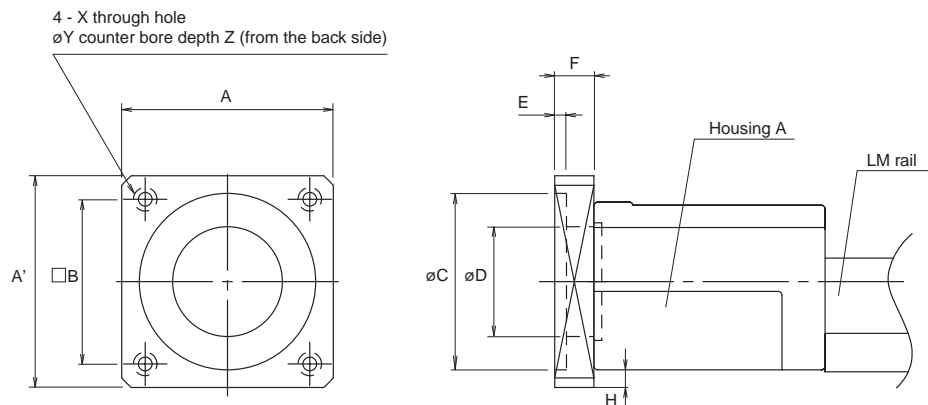

	Control number	A × A'	B	C	D	E	F	X	Y	Z
SKR33	0I	42 × 42	31	22	—	—	7	3.5	6	4

# THK LM-Guide Actuator SKR-type

## Precautions on Use

### ● Handling

- Exercise care when handling the product. Dropping or tapping it may result in breakage.
- Do not disassemble the product unless it is unavoidable. Disassembling the product unnecessarily may result in the entry of foreign matter or cause accuracy degradation.
- Operating the product exceeding the permissible revolution speed may lead to part breakage or accidents. The operating revolution speed should be limited to the range specified by THK.

### ● Operating temperature range

- The service temperature range of this product is 0 to 40°C (no freezing or condensation). If you consider using this product outside the service temperature range, contact THK.

### ● Lubrication


- To deliver the full extent of SKR-type functions, lubrication is essential. Use of the product without lubrication may result in increased abrasion at the rolling section or shorter life.
- Do not mix and use lubricants with different properties.
- The greasing intervals differ with the operating conditions. It is recommended that the greasing intervals be determined at the initial inspection.
- If the product is used in locations constantly exposed to vibration or in special environments such as clean rooms, vacuums, low temperatures, or high temperatures, there are cases where ordinary greases cannot be used. In such cases, contact THK.

### ● Use and Lubrication in Special Environments

- If locations are constantly exposed to vibration or in special environments such as clean rooms, vacuums, low temperatures, or high temperatures, consult THK.

### ● Safety precautions

- If the product is operating or in the ready state, never touch a moving part. In addition, do not enter the operating area of the actuator.
- If two or more people are involved in the operation, confirm the procedures such as a sequence, signs and anomalies in advance, and appoint another person for monitoring the operation.

- “LM Guide”, “Caged Ball” and  are the registered trademarks of THK CO., LTD.
- There may be differences between products appearing in photographs and the actual product.
- The appearance, specifications, and other information are subject to change without prior notice to improve reliability, function, etc. When deciding to adopt the product, contact us beforehand.
- We have exercised great care in preparing this catalog, but it is still possible that there are misspellings, omissions of letters, etc. THK assumes no responsibility or liability for damage resulting from such errors possibly contained herein.
- We employ the basic policy of observing the Foreign Exchange and Foreign Trade Control Law of Japan with regard to the export of our products/technologies or sales for export. For export of our products as discrete components, consult THK beforehand.

All rights reserved.

## THK CO., LTD.

HEAD OFFICE 3-1 1-6, NISHI-GOTANDA, SHINAGAWA-KU, TOKYO 141-8503 JAPAN  
INTERNATIONAL SALES DEPARTMENT PHONE:+81-3-5434-0351 FAX:+81-3-5434-0353

Global site : <http://www.thk.com/>

### NORTH AMERICA

THK America, Inc.

#### ● HEADQUARTERS

Phone:+1-847-310-1111 Fax:+1-847-310-1271

#### ● CHICAGO OFFICE

Phone:+1-847-310-1111 Fax:+1-847-310-1182

#### ● NEW YORK OFFICE

Phone:+1-845-369-4035 Fax:+1-845-369-4909

#### ● ATLANTA OFFICE

Phone:+1-770-840-7990 Fax:+1-770-840-7897

#### ● LOS ANGELES OFFICE

Phone:+1-949-955-3145 Fax:+1-949-955-3149

#### ● SAN FRANCISCO OFFICE

Phone:+1-925-455-8948 Fax:+1-925-455-8965

#### ● BOSTON OFFICE

Phone:+1-781-575-1151 Fax:+1-781-575-9295

#### ● DETROIT OFFICE

Phone:+1-248-858-9330 Fax:+1-248-858-9455

#### ● TORONTO OFFICE

Phone:+1-905-820-7800 Fax:+1-905-820-7811

### SOUTH AMERICA

THK Brasil LTDA

Phone:+55-11-3767-0100 Fax:+55-11-3767-0101

### EUROPE

THK GmbH

#### ● EUROPEAN HEADQUARTERS

Phone:+49-2102-7425-0 Fax:+49-2102-7425-217

#### ● DÜSSELDORF OFFICE

Phone:+49-2102-7425-0 Fax:+49-2102-7425-299

#### ● FRANKFURT OFFICE

Phone:+49-2102-7425-650 Fax:+49-2102-7425-699

#### ● STUTTGART OFFICE

Phone:+49-7150-9199-0 Fax:+49-7150-9199-888

#### ● MÜNCHEN OFFICE

Phone:+49-8937-0616-0 Fax:+49-8937-0616-26

#### ● U.K. OFFICE

Phone:+44-1908-30-3050 Fax:+44-1908-30-3070

#### ● ITALY MILANO OFFICE

Phone:+39-039-284-2079 Fax:+39-039-284-2527

#### ● ITALY BOLOGNA OFFICE

Phone:+39-051-641-2211 Fax:+39-051-641-2230

#### ● SWEDEN OFFICE

Phone:+46-8-445-7630 Fax:+46-8-445-7639

#### ● AUSTRIA OFFICE

Phone:+43-7229-51400 Fax:+43-7229-51400-79

#### ● SPAIN OFFICE

Phone:+34-93-652-5740 Fax:+34-93-652-5746

#### ● TURKEY OFFICE

Phone:+90-216-362-4050 Fax:+90-216-569-7150

THK France S.A.S.

Phone:+33-4-3749-1400 Fax:+33-4-3749-1401

### CHINA

THK (CHINA) CO.,LTD.

#### ● HEADQUARTERS

Phone:+86-411-8733-7111 Fax:+86-411-8733-7000

#### ● SHANGHAI OFFICE

Phone:+86-21-6219-3000 Fax:+86-21-6219-9890

#### ● BEIJING OFFICE

Phone:+86-10-8441-7277 Fax:+86-10-6590-3557

#### ● CHENGDU OFFICE

Phone:+86-28-8526-8025 Fax:+86-28-8525-6357

#### ● GUANGZHOU OFFICE

Phone:+86-20-8333-9770 Fax:+86-20-8333-9726

THK (SHANGHAI) CO.,LTD.

Phone:+86-21-6275-5280 Fax:+86-21-6219-9890

### TAIWAN

THK TAIWAN CO.,LTD.

#### ● TAIPEI HEAD OFFICE

Phone:+886-2-2888-3818 Fax:+886-2-2888-3819

#### ● TAICHUNG OFFICE

Phone:+886-4-2359-1505 Fax:+886-4-2359-1506

#### ● TAINAN OFFICE

Phone:+886-6-289-7668 Fax:+886-6-289-7669

### KOREA

SEOUL REPRESENTATIVE OFFICE

Phone:+82-2-3468-4351 Fax:+82-2-3468-4353

### SINGAPORE

THK LM SYSTEM Pte. Ltd.

Phone:+65-6884-5500 Fax:+65-6884-5550

### INDIA

BANGALORE REPRESENTATIVE OFFICE

Phone:+91-80-2330-1524 Fax:+91-80-2314-8226